#### FUNDAMENTALS OF EYE PROTECTION

EYE PROTECTION IS DESIGNED TO HELP SHIELD YOUR EYES FROM CERTAIN IMPACTS. DEBRIS, DUST, SPLASHES, AND OTHER POTENTIAL HAZARDS THAT COULD PRESENT SEVERE INJURY TO THE EYES. INCLUDING POTENTIAL BLINDNESS. PIP'S BOUTON® OPTICAL PROVIDES A COMPREHENSIVE LINE OF POTENTIAL SOLUTIONS FOR SAFETY EYEWEAR NEEDS.

#### SAFETY GLASSES

In addition to temples and nose pads to improve fit and comfort, there are several options also available to meet specific needs:

- Readers are available in different diopters and help magnify text so it becomes easier to read.
- Foam-Lined Safety Glasses seal better against the wearer's face, helping better protect against dust and other small debris. This style of eye protection is not recommended for splash protection.
- Over-The-Glass (OTG) Safety Glasses can be worn over prescription eyewear to provide the required protection. Standard eyeglasses cannot act as safety glasses and should not be treated as such.
- Dielectric Safety Glasses do not contain any metal components, making them non-conductive for those who are working near or around electricity.

Once the style of protective eyewear is chosen, the next consideration should be the lens technology for the task at hand. Depending on the work environment and lighting conditions, there are several different options for lenses. This information is detailed in the Bouton® Optical Lens Treatment Quick Guide on the subsequent pages.

#### **GOGGLES & FACE SHIELDS**

With goggles, the type of venting required for the work environment is the most critical consideration.

- Direct Vented goggles help minimize fogging and should be used when there is no liquid splash risk. Direct vented goggles have straight-line perforations that allow direct airflow from the work environment.
- Indirect Vented goggles help minimize fogging and should be used when there is liquid splash risk. Indirect vented goggles have hooded vents to allow indirect airflow from the work environment.
- Non-Vented have no openings for airflow or ventilation.

Face shields do just that – they protect the face from debris, such as sparks, or certain impacts. Face shields should not be used as a replacement for safety eyewear, as they are designed to be used in conjunction with eye protection products. Face shields can be worn with standard head gear or they can be fitted on your hard hat with the assistance of an adapter or bracket.

LENS TECHNOLOGIES

178 SAFETY GLASSES

**208** SAFETY GOGGLES

212 FACE PROTECTION

214 ACCESSORIES





**ALL BOUTON SAFETY EYEWEAR MEETS ANSI Z87.1-2015 STANDARDS** 



# 

FOR OVER 60 YEARS,
BOUTON® HAS BUILT ITS NAME
BY DEVELOPING SAFETY GLASSES
WORKERS WANT TO WEAR. BY
FOCUSING ON INNOVATION AND
STYLE, THE BOUTON® LEGACY
CONTINUES TO GROW TODAY.







## THE CLOSEST THING TO NOT WEARING GLASSES

Bouton® Anti-ReflectivePLUS® lenses allow an astounding 96% Visible Light Transmission (VLT) compared to the 88–90% VLT provided by standard clear lenses. Durable Anti-ReflectivePLUS® Anti-Reflective coating significantly reduces the amount of light that reflects back into the wearer's eyes, providing ultimate visual acuity. Inspect, distinguish and see with more clarity—and less eye fatigue.

**Available in the Following Styles:** Bullseye, Recon, Commander, Supersonic, O-Vision, Radar, Captain





#### TAKE ANTI-REFLECTIVE PLUS™ TECHNOLOGY OUTDOORS WITH MIRROR PLUS LENSES

A mirror coating on the face of the lens will deflect sunlight from the wearer's eyes, delivering noticeably less glare and reflection than standard gray lenses. Anti-ReflectivePLUS™ coating on the back of the lens significantly reduces light reflecting back into the eye for enhanced comfort and performance.

Available in the Following Styles: Sunburst, Squadron, Bond



#### FILTER REFLECTED SUNLIGHT FOR A CLEAR VIEW

Reflected sunlight from smooth surfaces, such as water, pavement, and snow can dangerously hinder vision and cause significant eyestrain. PolarizedXL5™ lenses filter the scatter light by controlling the angle at which it enters the lens. The result is clearer vision of the surrounding area and greatly reducing eye glare.

Available in the Following Styles: Commander, Sunburst





#### PROTECT AGAINST HARMFUL BLUE LIGHT

Overexposure to blue light, including smart phones, tablets and computer screens, has been known to cause eyestrain, fatigue and possibly contribute to long term macular degeneration. I/O Blue lenses are uniquely coated to help filter out harsh blue light and improve worker comfort and visual acuity. Lenses are also treated with a contrast booster to enhance color contrast.

Available in the Following Styles: Bullseye, Recon, Commander, Supersonic, Q-Vision, Radar, Captain, Bond, Blizzard



#### REDUCE GLARE FROM OVERHEAD LIGHT

High-powered overhead lights, such as fluorescent and mercury lighting, can cause glare that increases eye strain. Gradient lenses feature a slight mirror coating on the top portion of the lens, reducing glare, while the remainder of the lens remains clear. As a result, workers are still able to see clearly when looking straight ahead or down at their work.

Available in the Following Styles: Bullseye, Recon, Supersonic

### IT'S NOT LESS FOG IT'S FOGLESS



Lenses fog for many reasons, all of which are related to ambient temperature and moisture in the air. When a rapid temperature change occurs, micro-water droplets in the air will collect on untreated lenses, causing the lenses to fog and impede vision.

FOGLESS\* 3SIXTY™ TECHNOLOGY PROVIDES THE ULTIMATE FOG PREVENTION WHEN:

- : Transitioning between warm and cool environments
- : Working in a humid or wet environment
- : Engaging in an activity that causes perspiration
- :: Eye protection is used with respiratory equipment

FogLess® 3Sixty™ Technology

Standard Anti-Fog

#### THE CHOICE IS CLEAR

**BOUTON\* FOGLESS\* 3SIXTY™** was tested in accordance to procedures outlined in the European EN 166 standard in performing this test, lenses were pre-treated and repeatedly exposed to moisture for an extensive period, wiping continually to simulate harsh field conditions.

FOGLESS® 3SIXTY™ REMAINED CLEAR EVEN AFTER SIX MINUTES OF TESTING, NO OTHER PRODUCT WITH STANDARD ANTI-FOG TREATMENT CAME CLOSE.




Most eyewear on the market has only a light anti-fog coating that wears away quickly. Only Bouton® FogLess® 3Sixty™ Technology applies a densely bonded coating that continues to bead away water and moisture, even after repeated cleaning.



#### CAUTION

Lens fogging inhibits vision and productivity, which may result in workers removing their safety glasses - exposing their eyes to debris and impact. PIP's advanced FogLess® 3Sixty™ formulation was developed to adhere permanently to the lens, ensuring long-lasting performance that is able to withstand multiple lens cleanings.

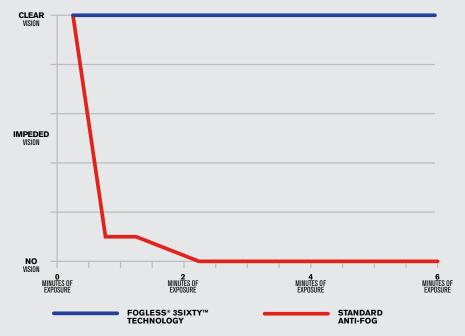



 $SUNBURST^{*}$ 

:: Lightweight, full frame design offers all day comfort

:: Bayonet temples are rubber co-molded for a secure fit

:: Non-slip rubber nose pads provide long-wear comfort

:: Anti-fog coating is standard on most models

:: 8 base curve



**LENS TECHNOLOGY** 





STYLE NUMBER	LENS	COATING	FRAME
250-47-0041	☐ Gray Polarized XL5™ Technology	Anti-Scratch / Anti-Fog	☐ Black
250-47-0004	■ Red Mirror Plus™ Technology	Anti-Scratch	☐ Black
250-47-0005	■ Silver Mirror Plus™ Technology	Anti-Scratch	☐ Black
250-47-0006	■ Blue Mirror Plus™ Technology	Anti-Scratch	☐ Black
250-47-0007	■ Gold Mirror Plus™ Technology	Anti-Scratch	☐ Black
250-47-0020	Clear	Anti-Scratch / Anti-Fog	☐ Black
250-47-0021	<b>□</b> Gray	Anti-Scratch / Anti-Fog	☐ Black
250-47-1008	☐ Green Mirror Plus™ Technology	Anti-Scratch / Anti-Fog	■ Brown
250-47-1042	☐ Brown Polarized XL5™ Technology	Anti-Scratch / Anti-Fog	☐ Brown



## WORK & ADVENTURE

 $SQUADRON^{T}$ 

MEETS ANSI **Z87.1**+

**LENS TECHNOLOGY** 

MIRROR PLUS"

- :: Full frame style designed to provide a universally comfortable fit
- :: Nylon bayonet temples eliminate pressure for all day comfort
- :: Stylish design looks good for work and leisure
- :: Dielectric design contains no metal parts
- :: Anti-fog coating is standard on most models
- :: 8.5 base curve

250-53-1024

STYLE NUMBER	LENS	COATING	FRAME
250-53-0020	Clear	Anti-Scratch / Anti-Fog	☐ Black
250-53-0021	☐ Gray	Anti-Scratch / Anti-Fog	☐ Black
250-53-0022	<b>■</b> I/0	Anti-Scratch / Anti-Fog	☐ Black
250-53-0006	■ Blue Mirror Plus™ Technology	Anti-Scratch	☐ Black



☐ Brown



Camo

Anti-Scratch / Anti-Fog

## MODERN CLASSIC

 $\mathsf{BOND}^{\scriptscriptstyle{\mathsf{TD}}}$ 

MEETS ANSI **Z87.1**+

**LENS TECHNOLOGY** 

△ I/O BLUE

MIRROR PLUS"

- :: Lightweight nylon frame provides ultimate comfort with practically no pressure behind the ear
- :: Keyhole bridge design sits naturally on the nose to fit many different faces
- :: Latest design trend in premium eye wear
- :: Dielectric materials and parts contain no metal
- :: Anti-fog coating is standard on most models
- :: 8.5 base curve

STYLE NUMBER	LENS	COATING	FRAME
250-57-0020	Clear	Anti-Scratch / Anti-Fog	☐ Charcoal
250-57-0021	☐ Gray	Anti-Scratch / Anti-Fog	☐ Charcoal
250-57-0226	■ I/O Blue Technology	Anti-Scratch / Anti-Fog	☐ Charcoal
250-57-0004	■ Red Mirror Plus™ Technology	Anti-Scratch	☐ Charcoal
250-57-0008	☐ Green Mirror Plus™ Technology	Anti-Scratch	☐ Charcoal





#### $\mathsf{COMMANDER}^{\scriptscriptstyle{\mathsf{TM}}}$

- :: Lightweight, semi-rimless design offers extended eye coverage and all day comfort
- :: Bayonet style temples with non-slip rubber pads for a secure fit
- :: Adjustable rubber nose pads offer a custom fit
- :: Anti-fog coating is standard on most models
- :: 9.5 base curve

#### **LENS TECHNOLOGY**







STYLE NUMBER	LENS	COATING	FRAME
250-33-0020	Clear	Anti-Scratch / Anti-Fog	□ Black 🌞
250-33-0021	<b>□</b> Gray	Anti-Scratch / Anti-Fog	□ Black 🌞
250-33-0010	■ Clear Anti-Reflective Plus <sup>™</sup> Technology	Anti-Scratch	□ Black 🌞
250-33-0226	■ I/O Blue Technology	Anti-Scratch / Anti-Fog	☐ Black
250-33-0041	☐ Gray Polarized XL5™ Technology	Anti-Scratch	□ Black 🌞
250-33-1020	Clear	Anti-Scratch / Anti-Fog	☐ Bronze
250-33-1024	<b>□</b> Gray	Anti-Scratch / Anti-Fog	☐ Bronze
250-33-1010	■ Clear Anti-Reflective Plus™ Technology	Anti-Scratch	☐ Bronze
250-33-1226	I/O Blue	Anti-Scratch / Anti-Fog	☐ Bronze
250-33-1042	☐ Brown Polarized XL5™ Technology	Anti-Scratch	☐ Bronze









#### 

MEETS ANSI MEETS CSA
Z87.1+ Z94.3

- :: Lightweight, semi-rimless design provides all day
- :: Sleek, sporty style with wraparound lens protection
- :: Bayonet temples with flexible rubber tips offer a comfortable, secure fit
- :: Soft rubber nose pads help keep the glasses in place
- :: Unique folding temples prevent arms from folding into and scratching the lenses
- :: 9 base curve

STYLE NUMBER	LENS	COATING	FRAME
250-AN-10110	■ Clear	Anti-Scratch	☐ Black
250-AN-10111	Clear	Anti-Scratch / Anti-Fog	🗆 Black 🖐
250-AN-10112	<b>□</b> Gray	Anti-Scratch	□ Black
250-AN-10113	■ Light Blue	Anti-Scratch	□ Black
250-AN-10114	<b>■</b> I/O	Anti-Scratch	🗆 Black 🖐
250-AN-10115	■ Blue Mirror	Anti-Scratch	☐ Black
250-AN-10116	Red Mirror	Anti-Scratch	□ Black
250-AN-10118	□ IR Filter 3.0	Anti-Scratch	☐ Black
250-AN-10119	□ IR Filter 5.0	Anti-Scratch	□ Black
250-AN-10120	Amber	Anti-Scratch	☐ Black
250-AN-10125	Silver Mirror	Anti-Scratch	☐ Black
250-AN-10126	☐ Gray	Anti-Scratch / Anti-Fog	🗆 Black 🖐
250-AN-10117	<b>□</b> Gray	Anti-Scratch	Red
250-AN-10121	□ Brown	Anti-Scratch	☐ Camouflage
250-AN-10122	Amber	Anti-Scratch	☐ Camouflage
250-AN-10123	<b>□</b> Gray	Anti-Scratch	☐ Camouflage
250-AN-10124	□ Brown	Anti-Scratch / Anti-Fog	☐ Camouflage
250-AN-10127	Amber	Anti-Scratch / Anti-Fog	☐ Camouflage
250-AN-10128	■ Silver Mirror	Anti-Scratch	☐ Camouflage
250-AN-10130	Clear	Anti-Scratch	☐ Camouflage
250-AN-10131	■ Clear	Anti-Scratch / Anti-Fog	☐ Camouflage









# ATHLETIC DESIGN









#### $Q\text{-VISION}^{^{\text{\tiny{M}}}}$

- :: Rimless design offers improved field of vision and comfort
- :: Co-injected rubber temple ends provide excellent temple grip
- :: Flexible nose bridge for a comfortable fit
- :: Dielectric, non-conductive frame
- :: Anti-fog coating is standard on most models
- :: 9.75 base curve



#### **LENS TECHNOLOGY**





STYLE NUMBER	LENS	COATING	FRAME
250-36-0020	<b>■</b> Clear	Anti-Scratch / Anti-Fog	Burgundy
250-36-0021	<b>□</b> Gray	Anti-Scratch / Anti-Fog	Burgundy
250-36-0010	■ Clear Anti-Reflective Plus™ Technology	Anti-Scratch	Burgundy
250-36-0025	Silver Mirror	Anti-Scratch / Anti-Fog	Burgundy
250-36-0226	■ I/O Blue Technology	Anti-Scratch / Anti-Fog	Burgundy
250-36-1020	<b>■</b> Clear	Anti-Scratch / Anti-Fog	■ Lime
250-36-1021	<b>□</b> Gray	Anti-Scratch / Anti-Fog	■ Lime
250-36-1010	■ Clear Anti-Reflective Plus™ Technology	Anti-Scratch	■ Lime
250-36-1226	■ I/O Blue Technology	Anti-Scratch / Anti-Fog	■ Lime

MEETS ANSI **Z87.1**+



#### $RADAR^{^{\!\scriptscriptstyle{\mathrm{T}}}}$

MEETS ANSI **Z87.1**+

- :: Lightweight, rimless design offers optimal protection
- :: Bayonet temples are rubber co-molded for a comfortable fit
- :: Non-slip rubber nose pads provide a secure fit
- :: Anti-fog coating is standard on most models
- :: 10 base curve

#### **LENS TECHNOLOGY**





STYLE NUMBER	LENS	COATING	FRAME
250-45-0020	<b>■</b> Clear	Anti-Scratch / Anti-Fog	<b>□</b> Gray
250-45-0021	<b>□</b> Gray	Anti-Scratch / Anti-Fog	<b>□</b> Gray
250-45-0010	■ Clear Anti-Reflective Plus™ Technology	Anti-Scratch	☐ Gray
250-45-0226	■ I/O Blue Technology	Anti-Scratch / Anti-Fog	<b>□</b> Gray
250-45-1020	Clear	Anti-Scratch / Anti-Fog	Red
250-45-1021	☐ Gray	Anti-Scratch / Anti-Fog	Red
250-45-1010	■ Clear Anti-Reflective Plus™ Technology	Anti-Scratch	Red
250-45-1226	■ I/O Blue Technology	Anti-Scratch / Anti-Fog	Red

# LOCKED IN



## RUGGED & RAW

#### $\mathsf{RECON}^{\scriptscriptstyle{\mathsf{TM}}}$





- :: Lightweight, rimless design for ergonomic fit
- :: Flexible bayonet temples contain rubber pads for a secure, non-slip fit
- :: Adjustable rubber nosepiece provides a comfortable fit
- :: Anti-fog coating is standard on most models
- :: 9 base curve

#### **LENS TECHNOLOGY**







STYLE NUMBER	LENS	COATING	FRAME
250-32-0020	<b>■</b> Clear	Anti-Scratch / Anti-Fog	🗖 Clear 🔌
250-32-0021	<b>□</b> Gray	Anti-Scratch / Anti-Fog	🗆 Black 🖐
250-32-0010	■ Clear Anti-Reflective Plus™ Technology	Anti-Scratch	🗖 Clear 🔌
250-32-0226	<b>■</b> I/0	Anti-Scratch / Anti-Fog	🔲 Brown 💃
250-32-0031	<b>■</b> Gradient	Anti-Scratch / Anti-Fog	🗆 Black 🖐
250-32-0520	■ Clear	Anti-Scratch / FogLess® 3Sixty™	Clear
250-32-0521	<b>□</b> Gray	Anti-Scratch / FogLess® 3Sixty™	☐ Gray





CAPTAIN<sup>™</sup>

- :: Lightweight, rimless design provides all day user comfort
- :: Bayonet temples with end tips that curve out for ease of placement on face
- :: Non-slip rubber nose pads offer a secure fit
- :: Anti-fog coating is standard on most models
- :: 10 base curve









STYLE NUMBER	LENS	COATING	FRAME
250-46-0020	<b>□</b> Clear	Anti-Scratch / Anti-Fog	Clear
250-46-0021	<b>□</b> Gray	Anti-Scratch / Anti-Fog	■ Gray
250-46-0010	■ Clear Anti-Reflective Plus™ Technology	Anti-Scratch	Clear
250-46-0226	■ I/O Blue Technology	Anti-Scratch / Anti-Fog	■ Brown
250-46-0520	■ Clear	Anti-Scratch / FogLess® 3Sixty™	■ Clear
250-46-0521	<b>□</b> Gray	Anti-Scratch / FogLess® 3Sixty™	☐ Gray

MEETS ANSI

## TAKE THE LEAD







## BOUTON LENS TREATMENT QUICK GUIDE

	VISIBLE LIGHT		
LENS TREATMENT/COLOR	TRANSMISSION	DESCRIPTION	BENEFITS
ANTI-SCRATCH		"Hardcoat" treatment toughens lens surface	Longer product life with fewer scratches.
ANTI-FOG		Surface coating that reduces fogging	Maintains clear vision. Ideal for food plants or cleaning operations with high-humidity environments.
■ CLEAR	90%	Clear polycarbonate lens	No color distortion, all polycarbonate has 99.9% UV absorption. General use.
<b>AMBER</b>	82%	Polycarbonate made of bright amber/yellow color	Enhances visual acuity. Ideal for professional drivers in foggy, rainy or snowy conditions.
■ INDOOR/OUTDOOR	60%	Light mirror coating on clear lens	Enough light transmission for use indoors, reduces pupil adjustment time. Ideal for indoor-outdoor workers.
■ INDOOR/OUTDOOR BLUE	55%	Slight yellow tint + light mirror coating	Alleviates "digital eye strain" from screens, ideal for anyone working extended periods with computer screens or electronic devices.
■ LIGHT BLUE	58%	Light blue tinted polycarbonate	Relieves eye strain from bright, overhead fluorescent lighting.
<b>■</b> GRAY	12%	Gray polycarbonate lens	Darkening effect with little color distortion, best used outdoors in bright sun.
□ DARK BROWN	12%	Brown polycarbonate lens	Darkening effect with improved color contrast. Best used outdoors in nature–green colors enhanced.
■ MIRROR	10-18%	Front surface coating reflects light from lens	Less light transmission for a darkening effect, great in bright environments: snow, sand, rocks, water.
☐ IR FILTER SHADE 3.0	10%	Dark green polycarbonate lens	Protection from welding arc and IR light. Not to be used for welding or when operating vehicles.
☐ IR FILTER SHADE 5.0	2%	Dark green polycarbonate lens	Protection from welding arc and IR light. Not to be used for welding or when operating vehicles.

#### SAFETY EYEWEAR DESIGN EVOLUTION



1950 - 1960's



1970 - 1980's



1990 - 2000's



LIGHTWEIGHT **ZENON Z-LYTE** Weighing only 16 grams, it is among **KEY FEATURE** Lightweight - Only 16 grams the lightest in the market today FIT Universal BRIDGE ENHANCED PROTECTION **TEMPLE** Spatula Enhanced lens design extends **BASE CURVE** 9.5 field of vision and protection STANDARDS MET ANSI Z87.1+ MODERN STYLE STYLE NUMBER LENS COATING FRAME Squared lens shape with a slight taper, 250-09-0000 ■ Clear Anti-Scratch Clear provides modern styling for the wearer ☐ Gray 250-09-0001 ☐ Gray Anti-Scratch **I**/0 Anti-Scratch 250-09-0002 ■ Clear SECURE FIT 250-09-0020 Clear Anti-Scratch / Anti-Fog 

Clear bouton OPTICAL Sleek temples with strategically perforated ☐ Gray Anti-Scratch / Anti-Fog Gray 250-09-0021 design ensures a flexible, secure fit to multiple head shapes and sizes NEVER-ENDING INNOVATION ZENON Z-LYTE WEIGHS ONLY 16 GRAMS PROTECTION



#### **ZENON Z12**

			· —
KEY FEATURE	Popular Style -	Fits Most Workers and A	pplications
FIT	Universal		
BRIDGE	Molded		
TEMPLE	Spatula		
BASE CURVE	9.5		
STANDARDS MET	ANSI Z87.1+	CSA Z94.3 - Styles Indic	ated Below 🌞
STYLE NUMBER	LENS	COATING	FRAME
250-01-0000	■ Clear	Anti-Scratch	☐ Black
250-01-0001	☐ Gray	Anti-Scratch	☐ Black
250-01-0002	1/0	Anti-Scratch	☐ Black
250-01-0004	Orange	Anti-Scratch	☐ Black
250-01-0005	Silver Mirror	Anti-Scratch	☐ Black
250-01-0020	Clear	Anti-Scratch / Anti-Fog	☐ Black
250-01-0021	☐ Gray	Anti-Scratch / Anti-Fog	☐ Black 🜞
250-01-0080	Clear	Uncoated	☐ Black
250-01-5503	Light Blue	Anti-Scratch	Light Blue
250-01-5504	☐ Dark Brown	Anti-Scratch	☐ Dark Brown
250-01-5509	Amber	Anti-Scratch	Amber
250-01-0900	Clear	Anti-Scratch	Clear 🜞
250-01-0902	1/0	Anti-Scratch	■ Clear
250-01-0920	■ Clear	Anti-Scratch / Anti-Fog	Clear 🜞
250-01-0980	■ Clear	Uncoated	■ Clear









KEY FEATURE	

KEY FEATURE	Redesigned Z12 for Narrower Faces				
FIT	Narrow				
BRIDGE	Molded				
TEMPLE	Spatula				
BASE CURVE	10				
STANDARDS MET	ANSI Z87.1+	CSA Z94.3 - Styles Indica	ated Below	*	
STYLE NUMBER	LENS	COATING	FRAME		
250-00-0000	Clear	Anti-Scratch	☐ Black		
250-00-0020	Clear	Anti-Scratch / Anti-Fog	Clear		
250-00-0001	☐ Gray	Anti-Scratch	☐ Black	*	
250-00-0002	<b>1</b> /0	Anti-Scratch	☐ Black		
250-00-0900	Clear	Anti-Scratch	Clear	*	
250-00-0920	■ Clear	Anti-Scratch / Anti-Fog	☐ Black		

#### **ZENON Z13**

KEY FEATURE	Flexible Rubber	Temples	
FIT	Universal		
BRIDGE	Molded		
TEMPLE	Rubber Tips		
BASE CURVE	10		
STANDARDS MET	ANSI Z87.1+	CSA Z94.3 - Styles Indica	ated Below 💃
STYLE NUMBER	LENS	COATING	FRAME
250-06-0000	■ Clear	Anti-Scratch	Clear
250-06-0002	1/0	Anti-Scratch	Brown 💃
250-06-0020	<b>■</b> Clear	Anti-Scratch / Anti-Fog	Clear 💃
250-06-0080	<b>■</b> Clear	Uncoated	<b>■</b> Clear
250-06-0005	Silver Mirror	Anti-Scratch	☐ Black
250-06-0006	Blue Mirror	Anti-Scratch	☐ Black
250-06-5501	☐ Gray	Anti-Scratch	☐ Dark Gray
250-06-5521	☐ Gray	Anti-Scratch / Anti-Fog	🔲 Dark Gray 🐗
250-06-5503	Light Blue	Anti-Scratch	Light Blue
250-06-5504	☐ Dark Brown	Anti-Scratch	☐ Dark Brown
250-06-5509	Amber	Anti-Scratch	Amber

#### **ZENON Z14SN**

KEY FEATURE	Flexible Rubber Temples & Comfortable Rubber Nose Bridge			
FIT	Universal			
BRIDGE	Rubber			
TEMPLE	Rubber Tips			
BASE CURVE	10			
STANDARDS MET	ANSI Z87.1+	CSA Z94.3 - Styles Indica	ated Below 🌞	
STYLE NUMBER	LENS	COATING	FRAME	
250-08-0000	Clear	Anti-Scratch	<b>■</b> Clear	
250-08-0002	<b>I</b> /0	Anti-Scratch	<b>■</b> Clear	
250-08-0020	Clear	Anti-Scratch / Anti-Fog	■ Clear 🖐	
250-08-0001	☐ Gray	Anti-Scratch	□ Black	
250-08-0005	Silver Mirror	Anti-Scratch	□ Black	
250-08-0021	☐ Gray	Anti-Scratch / Anti-Fog	□ Black 🖐	
250-08-5503	Light Blue	Anti-Scratch	■ Light Blue	
250-08-5509	Amber	Anti-Scratch / Anti-Fog	Amber	

## LIGHTWEIGHT & UNOBSTRUCTED PERIPHERAL VISION







#### **EVA®**

KEY FEATURE	Safety Eyewear	Designed Specifically for	Women
FIT	Women		
BRIDGE	Molded		
TEMPLE	Rubber Tips		
BASE CURVE	10		
STANDARDS MET	ANSI Z87.1+		
STYLE NUMBER	LENS	COATING	FRAME
250-10-0900	□ Clear	Anti-Scratch	Clear / Pink
250-10-0920	□ Clear	Anti-Scratch / Anti-Fog	Clear / Pink
250-10-0904	☐ Pink	Anti-Scratch	Clear / Pink
250-10-5501	<b>■</b> Gray	Anti-Scratch	■ Gray / Pink

#### **EVA® PETITE**

KEY FEATURE	Women's Style I	Designed for Slender Fac	es
FIT	Women		
BRIDGE	Molded		
TEMPLE	Rubber Tips		
BASE CURVE	11		
STANDARDS MET	ANSI Z87.1+		
STYLE NUMBER	LENS	COATING	FRAME
250-11-0900	☐ Clear	Anti-Scratch	Clear / Pink
250-11-0920	□ Clear	Anti-Scratch / Anti-Fog	Clear / Pink
250-11-0904	☐ Pink	Anti-Scratch	Clear / Pink
250-11-5501	<b>■</b> Gray	Anti-Scratch	Gray / Pink

#### **LADY EVA® READER**

KEY FEATURE	Safety Reader	rs Engineered fo	r Women	
FIT	Women			
BRIDGE	Molded			
TEMPLE	Rubber Tips			
BASE CURVE	10			
STANDARDS MET	ANSI Z87.1+			
STYLE NUMBER	LENS	COATING	FRAME	DIOPTER
250-12-0100	☐ Clear	Anti-Scratch	☐ Clear / Pink	1.00
250-12-0125	□ Clear	Anti-Scratch	Clear / Pink	1.25
250-12-0150	☐ Clear	Anti-Scratch	☐ Clear / Pink	1.50
250-12-0175	□ Clear	Anti-Scratch	Clear / Pink	1.75
250-12-0200	□ Clear	Anti-Scratch	☐ Clear / Pink	2.00
250-12-0225	□ Clear	Anti-Scratch	Clear / Pink	2.25
250-12-0250	□ Clear	Anti-Scratch	☐ Clear / Pink	2.50
250-12-0275	□ Clear	Anti-Scratch	Clear / Pink	2.75
250-12-0300	□ Clear	Anti-Scratch	☐ Clear / Pink	3.00

# EVA® SERIES DESIGNED TO FIT

2

A PORTION OF ALL PROCEEDS FROM OUR EVA® EYEWEAR IS PROUDLY DONATED TO ORGANIZATIONS WITH A MISSION OF COMBATING CANCER.

Breast cancer has impacted everyone in one way or another and Eva® eyewear provides a great venue to promote awareness.

Perhaps one more woman in the workplace will get a mammogram because she sees the pink ribbons on all of her co-workers' glasses.

Please help PIP support this wonderful cause as we provide a VISION FOR A CAUSE!

WOMEN bouton







#### WILCO

	WILCO			
	KEY FEATURE	Panoramic View	with Adjustable Length	Temples
	FIT	Universal		
-	BRIDGE	Rubber		
-	TEMPLE	Adjustable Spati	ıla	
-	BASE CURVE	8		
	STANDARDS MET	ANSI Z87.1+		
	STYLE NUMBER	LENS	COATING	FRAME
	250-92-0000	□ Clear	Anti-Scratch	■ Black
	250-92-0001	☐ Gray	Anti-Scratch	Black
	250-92-0002	□ I/0	Anti-Scratch	■ Black
	250-92-0005	☐ Silver Mirror	Anti-Scratch	■ Black
	250-92-0009	Amber	Anti-Scratch	■ Black
	250-92-0020	□ Clear	Anti-Scratch / Anti-Fog	■ Black
	250-92-0021	<b>□</b> Gray	Anti-Scratch / Anti-Fog	■ Black
ſ				

SUPERIOR SAFETY,







DI	ш	c	ᆮ

KEY FEATURE	Style and User (	Style and User Comfort in a Lightweight Design Universal			
FIT	Universal				
BRIDGE	Rubber				
TEMPLE	Bayonet, Rubber Tips 9.75  ANSI Z87.1+ CSA Z94.3 - Styles Indicated Below				
BASE CURVE					
STANDARDS MET				*	
STYLE NUMBER	LENS	COATING	FRAME		
250-49-0000	□ Clear	Anti-Scratch	□ Clear		
250-49-0020	□ Clear	Anti-Scratch / Anti-Fog	☐ Clear	*	
250-49-0021	☐ Gray	Anti-Scratch / Anti-Fog	■ Gray	*	
250-49-0022	□ I/O	Anti-Scratch / Anti-Fog	☐ Brown	*	

MONTERAY II			
KEY FEATURE	Modern Squared Lens Design with Rubber Temples and Br		
FIT	Universal		
BRIDGE	Rubber		
TEMPLE	Rubber Tips		
BASE CURVE	9.75		
STANDARDS MET	ANSI Z87.1+		
STYLE NUMBER	LENS	COATING	FRAME
250-MT-10070	☐ Clear	Anti-Scratch	■ Black
250-MT-10071	□ Clear	Anti-Scratch / Anti-Fog	■ Black
250-MT-10072	<b>□</b> Gray	Anti-Scratch	■ Black
250-MT-10074	☐ Amber	Anti-Scratch	■ Black

■ Black

#### TRANZMISSION

KEY FEATURE	Wraparound Sty	le and Special Temple Do	esign for Comfort
FIT	Universal		
BRIDGE	Rubber		
TEMPLE	Rubber Tips		
BASE CURVE	10		
STANDARDS MET	ANSI Z87.1+		
STYLE NUMBER	LENS	COATING	FRAME
250-71-0000	☐ Clear	Anti-Scratch	■ Black
250-71-0002	□ I/O	Anti-Scratch	■ Black
250-71-0020	□ Clear	Anti-Scratch / Anti-Fog	■ Black
250-71-0001	<b>□</b> Gray	Anti-Scratch	■ Black
250-71-0005	☐ Silver Mirror	Anti-Scratch	■ Black
250-71-0021	<b>□</b> Gray	Anti-Scratch / Anti-Fog	■ Black

## COMFORT & ENHANCED FEATURES

250-MT-10075





#### **BULLSEYE**

DOLLOLIL				
KEY FEATURE	Modern Design Availa	Modern Design Available in a Variety of Lenses		
FIT	Round			
BRIDGE	Molded			
TEMPLE	Bayonet, Rubber Tips	3		
BASE CURVE	9			
STANDARDS MET	ANSI Z87.1+	CSA Z94.3 - Styles Indica	ated Below 🌞	
STYLE NUMBER	LENS	COATING	FRAME	
250-31-0020	☐ Clear	Anti-Scratch / Anti-Fog	□ Clear 🖐	
250-31-0021	<b>□</b> Gray	Anti-Scratch / Anti-Fog	☐ Gray 🖐	
250-31-0023	Light Blue	Anti-Scratch / Anti-Fog	Light Blue	
250-31-0029	☐ Amber	Anti-Scratch / Anti-Fog	☐ Amber	
250-31-0010	☐ Clear Anti- Reflective PLUS™	Anti-Scratch	□ Clear	
250-31-0026	■ Blue Mirror	Anti-Scratch / Anti-Fog	☐ Gray 🖐	
250-31-0226	☐ I/O Blue	Anti-Scratch / Anti-Fog	☐ Brown	
250-31-0031	☐ Gradient	Anti-Scratch / Anti-Fog	□ Clear	





#### **SUPERSONIC**

SOFERSONIC	•		
KEY FEATURE	Fully Adjustable Tem	ples, and an Optional Dus	st Goggle Kit
FIT	Universal		
BRIDGE	Rubber		
TEMPLE	Fully Adjustable, Rub	ber Tips	
BASE CURVE	9		
STANDARDS MET	ANSI Z87.1+		
STYLE NUMBER	LENS	COATING	FRAME
250-34-0020	☐ Clear	Anti-Scratch / Anti-Fog	■ Black
250-34-0021	<b>□</b> Gray	Anti-Scratch / Anti-Fog	■ Black
250-34-0010	□ Clear Anti- Reflective PLUS™	Anti-Scratch	■ Black
250-34-0226	□ I/O Blue	Anti-Scratch / Anti-Fog	■ Black
250-34-0031	□ Gradient	Anti-Scratch / Anti-Fog	■ Black
250-34-FOAM		Foam/Strap Kit	■ Black







#### **HI-VOLTAGE ARC**

KEY FEATURE	Economic Eye	Protection with Adjust	able Length Temples
FIT	Universal		
BRIDGE	Molded		
TEMPLE	Spatula		
BASE CURVE	4		
STANDARDS MET	ANSI Z87.1+		
STYLE NUMBER	LENS	COATING	FRAME
250-24-0000	■ Clear	Anti-Scratch	☐ Black
250-24-0001	☐ Gray	Anti-Scratch	☐ Black
250-24-0080	<b>■</b> Clear	Uncoated	☐ Black
250-24-0300	■ Clear	Anti-Scratch	■ Red White Blue
250-24-0301	☐ Gray	Anti-Scratch	Red White Blue

#### HI-VOLTAGE AC

KEY FEATURE	Contemporary St	tyling with Bayonet Temple	s for Excellent Fit
FIT	Narrow		
BRIDGE	Rubber		
TEMPLE	Bayonet, Rubbe	r Tips	
BASE CURVE	10		
STANDARDS MET	ANSI Z87.1+		
STYLE NUMBER	LENS	COATING	FRAME
250-21-0100	■ Clear	Anti-Scratch	■ Blue
250-21-0101	☐ Gray	Anti-Scratch	■ Blue
250-21-0102	1/0	Anti-Scratch	■ Blue
250-21-0120	■ Clear	Anti-Scratch / Anti-Fog	■ Blue
250-21-0400	■ Clear	Anti-Scratch	☐ Black
250-21-0401	☐ Gray	Anti-Scratch	☐ Black
250-21-0402	1/0	Anti-Scratch	☐ Black
250-21-0403	■ Light Blue	Anti-Scratch	☐ Black
250-21-0409	Amber	Anti-Scratch	☐ Black
250-21-0420	■ Clear	Anti-Scratch / Anti-Fog	☐ Black
250-21-0421	☐ Gray	Anti-Scratch / Anti-Fog	☐ Black

#### **BLIZZARD**

KEY FEATURE	Sporty White Fr	ame Stands Out When W	orking Outdoors
FIT	Universal		
BRIDGE	Rubber		
TEMPLE	Bayonet, Rubbe	r Tips	
BASE CURVE	8		
STANDARDS MET	ANSI Z87.1+		
STYLE NUMBER	LENS	COATING	FRAME
250-48-0021	☐ Gray	Anti-Scratch / Anti-Fog	White
250-48-0006	■ Blue Mirror	Anti-Scratch	White
250-48-0226	I/O Blue	Anti-Scratch / Anti-Fog	White






#### **ADVERSARY**

KEY FEATURE	Popular Wrapar	Popular Wraparound Design Fits a Variety of Users			
FIT	Round				
BRIDGE	Rubber				
TEMPLE	Bayonet, Rubbe	r Tips			
BASE CURVE	8				
STANDARDS MET	ANSI Z87.1+				
STYLE NUMBER	LENS	COATING	FRAME		
250-28-0000	Clear	Anti-Scratch	☐ Black		
250-28-0001	☐ Gray	Anti-Scratch	☐ Black		
250-28-0002	1/0	Anti-Scratch	☐ Black		
250-28-0003	Light Blue	Anti-Scratch	☐ Black		
250-28-0006	Silver Mirror	Anti-Scratch	☐ Black		
250-28-0009	Amber	Anti-Scratch	☐ Black		
250-28-0020	Clear	Anti-Scratch / Anti-Fog	☐ Black		
250-28-0021	☐ Gray	Anti-Scratch / Anti-Fog	☐ Black		

## WRAPAROUND LENS

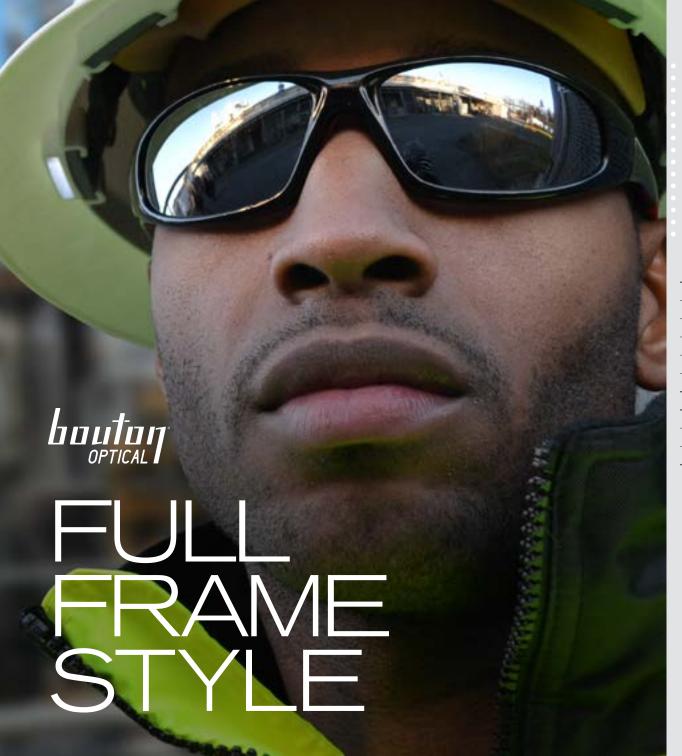



#### TRADITIONAL SPECTACLE

KEY FEATURE	Classic Styling i	Classic Styling in a Durable Propionate Frame		
FIT	Universal			
BRIDGE	Molded			
TEMPLE	Spatula			
BASE CURVE	6			
STANDARDS MET	ANSI Z87.1+			
STYLE NUMBER	LENS	COATING	FRAME	
249-5907-400	□ Clear	Anti-Scratch / Anti-Fog	■ Smoke	
249-5907-401	<b>□</b> Gray	Anti-Scratch / Anti-Fog	■ Smoke	
249-5907-207	■ IR Filter 3.0	Anti-Scratch / Anti-Fog	■ Smoke	

STYLISH DESIGN &




#### **FLASHFIRE**

KEY FEATURE	Padded Upper Br	ow Provides Additional C	Comfort
FIT	Universal		
BRIDGE	Rubber		
TEMPLE	Rubber Tips		
BASE CURVE	8		
STANDARDS MET	ANSI Z87.1+		
STYLE NUMBER	LENS	COATING	FRAME
250-60-0620	□ Clear	Anti-Scratch / Anti-Fog	☑ Silver / Blue
250-60-0020	□ Clear	Anti-Scratch / Anti-Fog	■ Black / Red
250-60-0630	Green Mirror	Anti-Scratch / Anti-Fog	☑ Silver / Green
250-60-0625	Red Mirror	Anti-Scratch / Anti-Fog	Silver / Red
250-60-0628	☐ Silver Mirror	Anti-Scratch / Anti-Fog	■ Black / Red
250-60-0626	■ Blue Mirror	Anti-Scratch / Anti-Fog	☑ Silver / Blue

### ALL DAY COMFORT



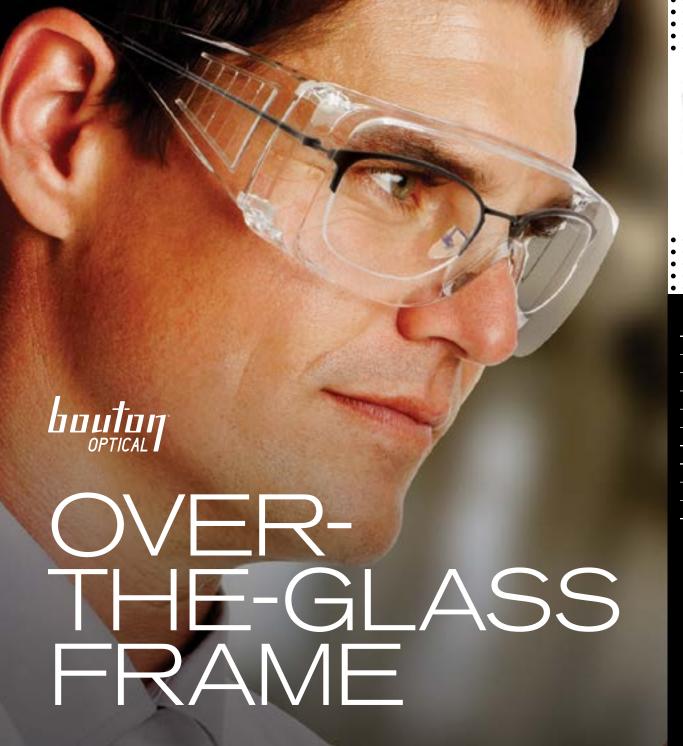



SCOUT				
KEY FEATURE	Popular Visitor S	pec Designed to Fit Over	All Personal Gl	asses
FIT	Over-The-Glass			
BRIDGE	Molded			
TEMPLE	Spatula			
BASE CURVE	4			
STANDARDS MET	ANSI Z87.1+	CSA Z94.3 - Styles Ind	icated Below	*
STYLE NUMBER	LENS	COATING	FRAME	
250-99-0900	Clear	Anti-Scratch	■ Clear	
250-99-0901	☐ Gray	Anti-Scratch	☐ Gray	
250-99-0980	Clear	Uncoated	■ Clear	*

FITS OVER MOST



RANGER			
KEY FEATURE	Slimmer Desigi	n Fits Over Smaller Perso	onal Eyewear
FIT	Over-The-Glass		
BRIDGE	Molded		
TEMPLE	Spatula		
BASE CURVE	6		
STANDARDS MET	ANSI Z87.1+		
STYLE NUMBER	LENS	COATING	FRAME
250-37-0900	■ Clear	Anti-Scratch	<b>■</b> Clear
250-37-0980	<b>■</b> Clear	Uncoated	<b>■</b> Clear

ZENON Z28			
KEY FEATURE	OTG Design wit	h Adjustable Length Tem	ples
FIT	Over-The-Glass		
BRIDGE	Molded		
TEMPLE	Spatula		
BASE CURVE	4		
STANDARDS MET	ANSI Z87.1+		
STYLE NUMBER	LENS	COATING	FRAME
250-03-0000	■ Clear	Anti-Scratch	☐ Black
250-03-0001	☐ Gray	Anti-Scratch	☐ Black
250-03-0080	■ Clear	Uncoated	□ Black

OVERSITE			
KEY FEATURE	Fully Adjustable	OTG Design for a Custon	nized Fit
FIT	Over-The-Glass		
BRIDGE	Molded		
TEMPLE	Fully Adjustable	, Co-Molded	
BASE CURVE	3		
STANDARDS MET	ANSI Z87.1+		
STYLE NUMBER	LENS	COATING	FRAME
250-98-0080	Clear	Uncoated	□ Black / Gray
250-98-0000	Clear	Anti-Scratch	☐ Black / Gray
250-98-0013	☐ IR Filter 3.0	Anti-Scratch	☐ Black / Gray
250-98-0020	Clear	Anti-Scratch / Anti-Fog	☐ Black / Gray

## PRESCRIPTION EYEWEAR OR USE AS A VISITOR SPECTACLE





#### **FUSELAGE**

IUSLLAGE				
KEY FEATURE	Adapts to Any \	Working Condition with	Dust Goggle	Conversion
FIT	Universal			
BRIDGE	Molded			
TEMPLE	Bayonet, Rubb	oer Tips		
BASE CURVE	8			
STANDARDS MET	ANSI Z87.1+			
STYLE NUMBER	LENS	COATING	FR	AME
250-50-0420	☐ Clear	Anti-Scratch / Anti-	Fog <b></b>	Black
250-50-0421	<b>□</b> Gray	Anti-Scratch / Anti-	Fog <b></b>	Black
250-50-0422	□ I/0	Anti-Scratch / Anti-	Fog <b></b>	Black
250-50-0425	☐ Silver Mirro	r Anti-Scratch / Anti-	Fog <b></b>	Black
250-50-0426	■ Blue Mirror	Anti-Scratch / Anti-	Fog <b></b>	Black
250-50-0429	☐ Amber	Anti-Scratch / Anti-	Fog <b></b>	Black
250-50-0520	□ Clear	Anti-Scratch / FogLess® 3Sixty™	-	Black
250-50-0521	<b>□</b> Gray	Anti-Scratch / FogLess® 3Sixty™		Black
FUSELAGE R	EADERS			
STYLE NUMBER	LENS	COATING	FRAME	DIOPTER
250-51-0015	□ Clear	Anti-Scratch / Anti-Fog	■ Black	1.50
250-51-0020	□ Clear	Anti-Scratch / Anti-Fog	■ Black	2.00
250-51-0025	□ Clear	Anti-Scratch / Anti-Fog	■ Black	2.50
250-51-0030	☐ Clear	Anti-Scratch / Anti-Fog	■ Black	3.00








CEFIRO			
KEY FEATURE	Foam Padded D	esign Converts to a Dust	Goggle
FIT	Narrow		
BRIDGE	Rubber		
TEMPLE	Bayonet		
BASE CURVE	8		
STANDARDS MET	ANSI Z87.1+		
STYLE NUMBER	LENS	COATING	FRAME
250-CE-10090	☐ Clear	Anti-Scratch / Anti-Fog	■ Black
250-CE-10091	<b>□</b> Gray	Anti-Scratch / Anti-Fog	■ Black
250-CE-10092	□ I/O	Anti-Scratch / Anti-Fog	■ Black
250-CE-10093	■ Blue Mirror	Anti-Scratch / Anti-Fog	■ Black
250 CE 10005	Cilvor Mirror	Anti Caratah / Anti Eag	■ Dlook

SUPERSONIC			
KEY FEATURE	Fully Adjustable Temp	oles, and an Optional Dus	t Goggle Kit
FIT	Universal		
BRIDGE	Rubber		
TEMPLE	Fully Adjustable, Rub	ber Tips	
BASE CURVE	9		
STANDARDS MET	ANSI Z87.1+		
STYLE NUMBER	LENS	COATING	FRAME
250-34-0020	□ Clear	Anti-Scratch / Anti-Fog	■ Black
250-34-0021	<b>□</b> Gray	Anti-Scratch / Anti-Fog	■ Black
250-34-0010	□ Clear Anti- Reflective™ PLUS	Anti-Scratch	■ Black
250-34-0226	□ I/O Blue	Anti-Scratch / Anti-Fog	■ Black
250-34-0031	☐ Gradient	Anti-Scratch / Anti-Fog	■ Black
250-34-FOAM		Foam / Strap Kit	■ Black

ZENON Z12F			
KEY FEATURE	Foam Lined Ver	sion of the Popular Z12	
FIT	Universal		
BRIDGE	Molded		
TEMPLE	Spatula		
BASE CURVE	9.5		
STANDARDS MET	ANSI Z87.1+		
STYLE NUMBER	LENS	COATING	FRAME
250-01-F020	☐ Clear	Anti-Scratch / Anti-Fog	■ Black
250-01-F021	<b>□</b> Gray	Anti-Scratch / Anti-Fog	■ Black
250-01-F022	□ I/0	Anti-Scratch / Anti-Fog	■ Black

## FOAM LINING PROTECTS AGAINST DEBRIS & AIRBORNE PARTICLES

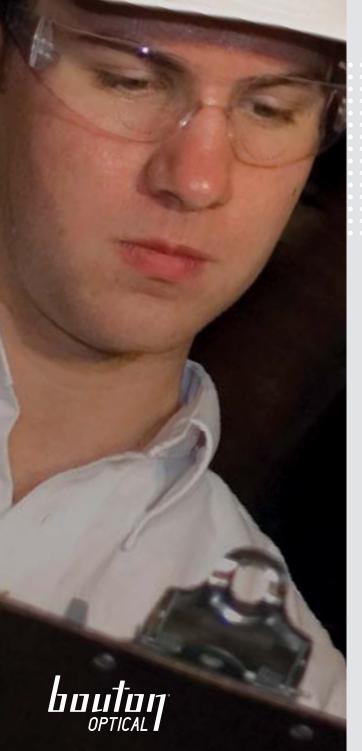





#### **ZENON Z12 READERS**

KEY FEATURE	Reader Versio	n of the Popula	r Z12 Style in +	0.25 Diopters
FIT	Universal			
BRIDGE	Rubber			
TEMPLE	Spatula, Co-N	lolded		
BASE CURVE	10			
STANDARDS MET	ANSI Z87.1+			
STYLE NUMBER	LENS	COATING	FRAME	DIOPTER
250-27-0010	□ Clear	Anti-Scratch	□ Clear	1.00
250-27-0012	□ Clear	Anti-Scratch	□ Clear	1.25
250-27-0015	□ Clear	Anti-Scratch	□ Clear	1.50
250-27-0017	□ Clear	Anti-Scratch	□ Clear	1.75
250-27-0020	□ Clear	Anti-Scratch	☐ Clear	2.00
250-27-0022	☐ Clear	Anti-Scratch	☐ Clear	2.25
250-27-0025	□ Clear	Anti-Scratch	☐ Clear	2.50
250-27-0027	□ Clear	Anti-Scratch	☐ Clear	2.75
250-27-0030	□ Clear	Anti-Scratch	☐ Clear	3.00
250-27-0115	<b>□</b> Gray	Anti-Scratch	<b>□</b> Gray	1.50
250-27-0120	<b>□</b> Gray	Anti-Scratch	<b>□</b> Gray	2.00
250-27-0125	<b>□</b> Gray	Anti-Scratch	<b>□</b> Gray	2.50
250-27-0130	<b>□</b> Gray	Anti-Scratch	<b>□</b> Gray	3.00

#### **ZENON Z13 READERS**

KEY FEATURE	Reader Versio	Reader Version of the Popular Z13 Style in +0.25 Diopters			
FIT	Universal				
BRIDGE	Molded				
TEMPLE	Rubber Tips				
BASE CURVE	10				
STANDARDS MET	ANSI Z87.1+				
STYLE NUMBER	LENS	COATING	FRAME	DIOPTER	
250-26-0010	□ Clear	Anti-Scratch	□ Clear	1.00	
250-26-0012	□ Clear	Anti-Scratch	☐ Clear	1.25	
250-26-0015	□ Clear	Anti-Scratch	□ Clear	1.50	
250-26-0017	□ Clear	Anti-Scratch	□ Clear	1.75	
250-26-0020	□ Clear	Anti-Scratch	□ Clear	2.00	
250-26-0022	□ Clear	Anti-Scratch	☐ Clear	2.25	
250-26-0025	□ Clear	Anti-Scratch	☐ Clear	2.50	
250-26-0030	□ Clear	Anti-Scratch	□ Clear	3.00	









#### LADY EVA® READER

Safety Readers Engineered For Women			
Women			
Molded			
Rubber Tips			
10			
ANSI Z87.1+			
LENS	COATING	FRAME	DIOPTER
□ Clear	Anti-Scratch	Clear / Pink	1.00
☐ Clear	Anti-Scratch	Clear / Pink	1.25
□ Clear	Anti-Scratch	Clear / Pink	1.50
☐ Clear	Anti-Scratch	Clear / Pink	1.75
□ Clear	Anti-Scratch	Clear / Pink	2.00
□ Clear	Anti-Scratch	Clear / Pink	2.25
□ Clear	Anti-Scratch	Clear / Pink	2.50
□ Clear	Anti-Scratch	Clear / Pink	2.75
□ Clear	Anti-Scratch	Clear / Pink	3.00
	Women Molded Rubber Tips 10 ANSI Z87.1+ LENS Clear Clear Clear Clear Clear Clear Clear Clear Clear	Women	Women

#### **MAG READERS**

KEY FEATURE	Safety Read	ers in a Semi-Riml	ess Design	
FIT	Universal			
BRIDGE	Rubber			
TEMPLE	Rubber Tips			
BASE CURVE	8			
STANDARDS MET	ANSI Z87.1+	-		
STYLE NUMBER	LENS	COATING	FRAME	DIOPTER
250-25-0010	□ Clear	Anti-Scratch	■ Black	1.00
250-25-0015	☐ Clear	Anti-Scratch	■ Black	1.50
250-25-0020	☐ Clear	Anti-Scratch	■ Black	2.00
250-25-0025	☐ Clear	Anti-Scratch	■ Black	2.50
250-25-0030	☐ Clear	Anti-Scratch	■ Black	3.00
250-25-0115	<b>□</b> Gray	Anti-Scratch	■ Black	1.50
250-25-0120	<b>□</b> Gray	Anti-Scratch	■ Black	2.00
250-25-0125	<b>□</b> Gray	Anti-Scratch	■ Black	2.50
250-25-0130	<b>□</b> Gray	Anti-Scratch	■ Black	3.00
DOUBLE MAG	READER	S - TOP & B	оттом г	DIOPTER
STYLE NUMBER	LENS	COATING	FRAME	DIOPTER
250-25-1515	□ Clear	Anti-Scratch / Anti-Fog	■ Black	1.50
250-25-2020	□ Clear	Anti-Scratch / Anti-Fog	■ Black	2.00
250-25-2525	□ Clear	Anti-Scratch /	■ Black	2.50

Anti-Fog

#### **FUSELAGE READERS**

KEY FEATURE	Top Selling Fo	Top Selling Fuselage Dust Goggle in a Reader Version			
FIT	Universal				
BRIDGE	Molded				
TEMPLE	Bayonet, Rub	ber Tips			
BASE CURVE	8				
STANDARDS MET	ANSI Z87.1+				
STYLE NUMBER	LENS	COATING	FRAME	DIOPTER	
250-51-0015	□ Clear	Anti-Scratch / Anti-Fog	■ Black	1.50	
250-51-0020	□ Clear	Anti-Scratch / Anti-Fog	■ Black	2.00	
250-51-0025	□ Clear	Anti-Scratch / Anti-Fog	■ Black	2.50	
250-51-0030	□ Clear	Anti-Scratch / Anti-Fog	■ Black	3.00	









CO	ΝТ	ΕV	ΙP	O
$\mathbf{v}$		1		

Modern Styling with Swivel Headband Adjustment			
Industrial, Cor	nstruction, Med	ical	
PVC			
Will Fit Over F	rescription Gla	sses	
5.75			
ANSI Z87.1+	CSA Z94.3 - 8	Styles Indicat	ted Below 🌞
LENS	COATING	FRAME	HEADBAND
Clear	Anti-Scratch	Blue	Elastic
■ Clear	Anti-Scratch / Anti-Fog	■ Blue	Elastic
■ Clear	Anti-Scratch / Anti-Fog	■ Blue	Neoprene 🝁 Rubber
<b>□</b> Gray	Anti-Scratch / Anti-Fog	■ Blue	Elastic
	Industrial, Cor PVC Will Fit Over F 5.75 ANSI Z87.1+  LENS Clear Clear	Industrial, Construction, Med PVC Will Fit Over Prescription Gla 5.75  ANSI Z87.1+ CSA Z94.3 - 8  LENS COATING Clear Anti-Scratch Clear Anti-Scratch / Anti-Fog Clear Anti-Scratch / Anti-Fog Gray Anti-Scratch /	Industrial, Construction, Medical  PVC  Will Fit Over Prescription Glasses  5.75  ANSI Z87.1+ CSA Z94.3 - Styles Indicated Indicated Styles In

#### FORTIS I

KEY FEATURE	Lightweight G	oggle with Com	fortable Sea	ling Properties
APPLICATIONS	Industrial, Cor	nstruction, Medi	cal	
FRAME MATERIAL	Synthetic Rub	ber		
FIT	Will Fit Over S	Some Prescripti	on Glasses	
BASE CURVE	5			
STANDARDS MET	ANSI Z87.1+,	ANSI D3 Drople	t	
INDIRECT VENTILATION				
STYLE NUMBER	LENS	COATING	FRAME	HEADBAND
251-80-0020	■ Clear	Anti-Scratch / Anti-Fog	☐ Gray	Elastic
251-80-0020-RHB	<b>■</b> Clear	Anti-Scratch / Anti-Fog	☐ Gray	Neoprene Rubber

#### STONE

SIONE					
KEY FEATURE	Optional Visor	Optional Visor Attachment for Face Protection			
APPLICATIONS	Industrial, Con	struction, Medical			
FRAME MATERIAL	PVC				
FIT	Will Fit Over P	rescription Glasses			
BASE CURVE	5				
STANDARDS MET	ANSI Z87.1+, ANSI D3 Droplet				
INDIRECT VENTIL	ATION				
STYLE NUMBER	LENS	COATING	FRAME	HEADBAND	
251-60-0020	<b>■</b> Clear	Anti-Scratch / FogLess® 3Sixty™	☐ Gray	Elastic	
251-60-000V	Visor Only - Polycarbonate - ANSI Z87.1+				

## SUPERIOR COMFORT & HIGH PERFORMANCE







REACTION				
KEY FEATURE	Dual Lens Des	sign for Ultimate	Anti-Fog Pro	perties
APPLICATIONS	Industrial, Con	struction, Medi	cal	
FRAME MATERIAL	PVC	PVC		
FIT	Will Not Fit Ov	Will Not Fit Over Prescription Glasses		
BASE CURVE	5.75			
STANDARDS MET	ANSI Z87.1+,	ANSI D3 Drople	t	
INDIRECT VENTILATION	ON			
STYLE NUMBER	LENS	COATING	FRAME	HEADBAND
251-65-0020	<b>■</b> Clear	Anti-Scratch / Anti-Fog	☐ Gray	Elastic
251-65-0020-RHB	■ Clear	Anti-Scratch / Anti-Fog	☐ Gray	Neoprene Rubber
251-65-0021-RHB	☐ Gray	Anti-Scratch /	■ Gray	Neoprene Rubber









#### BASIC

<b>DAG!</b>						
KEY FEATURE	Popular [	Popular Design for Economical Applications				
APPLICATIONS	Industrial	Industrial, Construction, Medical				
FRAME MATERIAL	Vinyl	Vinyl				
FIT	Will Fit 0	Will Fit Over Prescription Glasses				
BASE CURVE	Flat	Flat				
STANDARDS MET	ANSI Z87	ANSI Z87.1+				
INDIRECT VENTILAT	ION					
STYLE NUMBER	LENS	COATING	FRAME	HEADBAND		
248-4401-300	□ Clear	Uncoated	□ Clear	Elastic		
248-4401-400	□ Clear	Anti-Scratch / Fog	☐ Clear	Elastic		
DIRECT VENTILATION	N					
STYLE NUMBER	LENS	COATING	FRAME	HEADBAND		
248-4400-300	□ Clear	Uncoated	□ Clear	Elastic		
248-4400-400	☐ Clear	Anti-Scratch / Fog	☐ Clear	Elastic		

#### **SOFTSIDES**

KEY FEATURE	Soft, Flex	Soft, Flexible Vinyl Body Molds Comfortably to the Face			
APPLICATIONS	Industrial	Industrial, Construction, Medical			
FRAME MATERIAL	Vinyl				
FIT	Will Fit 0	ver Prescription Glas	ses		
BASE CURVE	Flat				
STANDARDS MET	ANSI Z87	.1+, ANSI D3 Droplet	- Styles Indica	ted Below	
INDIRECT VENTILATI	DN				
STYLE NUMBER	LENS	COATING	FRAME	HEADBAND	
248-5190-300B	□ Clear	Anti-Scratch	☐ Clear	Elastic	
248-5190-400B	□ Clear	Anti-Scratch / Fog	☐ Clear	Elastic	
DIRECT VENTILATION					
STYLE NUMBER	LENS	COATING	FRAME	HEADBAND	
248-5090-300B	□ Clear	Anti-Scratch	☐ Clear	Elastic	
248-5090-400B	□ Clear	Anti-Scratch / Fog	☐ Clear	Elastic	
NON-VENTED					
STYLE NUMBER	LENS	COATING	FRAME	HEADBAND	
248-5290-300B	□ Clear	Anti-Scratch	□ Clear	Elastic	
248-5290-400B	□ Clear	Anti-Scratch / Fog	☐ Clear	Elastic	

## SAFE & RELIABLE, FITS SNUG TO THE FACE

### **VENTILATION OPTIONS**



#### **NON-VENTED**

Non-vented goggles have no openings for airflow or ventilation.



#### **INDIRECT VENTILATION**

Indirect vented goggles help minimize fogging and should be used when there is liquid splash risk. Indirect vented goggles have hooded vents to allow indirect airflow from the work environment.



#### **DIRECT VENTILATION**

Direct vented goggles help minimize fogging and should be used when there is no liquid splash risk. Direct vented goggles have straight-line perforations that allow direct airflow from the work environment.



#### FACE SHIELD MATERIALS

PETG Ideal for general grinding and liquid splash applications.

POLYCARBONATE Ideal for grinding and liquid splash applications, and suitable for high heat and heavier duty applications.

MOLDED POLYCARBONATE Provide enhanced optics, including peripheral vision. Aspherical design allows for more comfortable movement.

STEEL WIRE MESH Product of choice for forestry and lumber applications. Screen mesh provides air circulation.



#### MOLDED POLYCARBONATE







#### FLAT SHEET POLYCARBONATE



#### STEEL WIRE MESH



251-01-7701

#### **SAFETY VISORS - UNIVERSAL FIT**

STYLE NUMBER	MATERIAL	LENS	THICKNESS	SIZE	BINDING	SHAPE	STANDARDS
251-01-5211	PETG	□ Clear	0.040"	8" x 15.5"		Flat	ANSI Z87
251-01-5212	PETG	■ Medium Green	0.040"	8" x 15.5"		Flat	ANSI Z87
251-01-7214	PETG	□ Clear	0.040"	9" x 15.5"	Aluminum	Curved	ANSI Z87
251-01-5201	Polycarbonate	□ Clear	0.040"	8" x 15.5"		Flat	ANSI Z87+
251-01-7206	Polycarbonate	□ Clear	0.060"	8" x 15.5"		Flat	ANSI Z87+
251-01-7204	Polycarbonate	□ Clear	0.040"	9" x 15.5"	Aluminum	Curved	ANSI Z87+
251-01-7301	Polycarbonate	□ Clear	0.078"	8" x 15"		Molded-Cylindrical	ANSI Z87+
251-01-7401	Polycarbonate	□ Clear	0.078"	8" x 15"		Molded-Aspherical	ANSI Z87+
251-01-7311	Polycarbonate	■ Medium Green	0.078"	8" x 15"		Molded-Cylindrical	ANSI Z87+
251-01-7312	Polycarbonate	■ Dark Green	0.078"	8" x 15"		Molded-Cylindrical	ANSI Z87+
251-01-7313	Polycarbonate	■ IR Filter 3.0	0.078"	8" x 15"		Molded-Cylindrical	ANSI Z87+
251-01-7315	Polycarbonate	■ IR Filter 5.0	0.078"	8" x 15"		Molded-Cylindrical	ANSI Z87+
251-01-7701	Steel Wire Mesh		24 Wire per in.	8" x 15.5"	Aluminum	Cylindrical	ANSI Z87
JSP® SUREFI	T™ SAFETY	VISORS	1				
251-01-6201*	Polycarbonate	□ Clear	0.047''	8" x 21"		Heat Formed	ANSI Z87+
251-01-6211*	Acetate	□ Clear	0.047''	8" x 21"		Heat Formed	ANSI Z87+

JSP® Surefit™ Safety Visors only fit JSP® Surefit™ Hard Hat Bracket (251-01-6225)

#### **HEADGEAR & BRACKETS**

HEADGEAR Is used when a face shield is needed, but a hard hat is not

BRACKETS Allow the attachment of a safety visor to a hard hat

All Bouton® headgear and brackets are designed with a universal hole pattern.

#### HEADGEAR Used without hard hats



#### BRACKETS Used with hard hats



#### **HEADGEAR**

STYLE NUMBER	STYLE	HOLE PATTERN	COLOR
251-01-5200	Premium Fine Tooth Ratchet	Universal	■ Blue
251-01-5400	Economy Ratchet	Universal	■ Blue
BRACKETS			
STYLE NUMBER	COMPATIBLE WITH	HOLE PATTERN	MATERIAL
251-01-5270	Full Brim	Universal	Aluminum
251-01-5271	Cap Style	Universal	Aluminum
251-01-6230-JSP	JSP® Evolution® Cap Style	Universal	Aluminum
251-01-5225	Cap Style Hard Hat with Universal Slots	Universal	Plastic
251-01-6225**	JSP® Standard Brim & Short Brim	JSP® Surefit™ Safety Visors	Plastic

JSP® Surefit™ Hard Hat Bracket will only fit the JSP® Surefit™ Safety Visors (251-01-6201 & 251-01-6211)

#### DISPLAY YOUR BOUTON® EYEWEAR





252-CDS-12

252-CDL-06

#### **BOUTON® EYEWEAR DISPLAYS**

STYLE NUMBER	DESCRIPTION
252-CDL-06	Bouton® 6 Piece Diamond Plate Display
252-CDS-12	Bouton® 3 Sided Pop-Up Display



#### **BLACK NECK CORDS**

- Keeps glasses close at hand for a safer workplace

STY	LE	NU	M	В	EF	

STILL NOWIDER	
252-L401	Rugged Nylon
252-L404	Economy Slim Nylon
252-L407	Adjustable Sports Cord



#### **UNIVERSAL FLEX SIDESHIELDS**

- Weaves through the temple for added side protection
- Molded to a bendable softness
- Temple will still fold correctly
- No parts or tools required
- Meets ANSI Z87.1+ requirements

STYLE NUMBER	COLOR
252-FX-0001	□ Clear

Patented product of Vision Aid

### IDEAL FOR SAFETY GLASSES, GOGGLES OR FACESHIELDS







#### **LENS CLEANING TOWELETTE DISPENSER**

STYLE NUMBER	CLEANING FUNCTION	MATERIALS	RESTRICTIONS	WALL Mount	PACKAGING
252-LCT100	Anti-Fog, Anti-Static, Anti-Streaking	Pre-Moistened Towelettes	None	Yes	100 individual towelettes, 10 dispensers per case
LENS CLEA	NING STAT	ION			
252-LCS08	Anti-Fog, Anti-Static, Alcohol-Free	Spray Cleaner & Lint-free Tissues	None	Yes	8 oz. bottle & two 300-count tissue boxes, 8 stations per case
FOG BUSTE	R				
252-FB30	Anti-Fog	Pre-Moistened Towelettes	Mirrored or Anti-Reflective Coated	No	30 applications per box, 6 boxes per case